


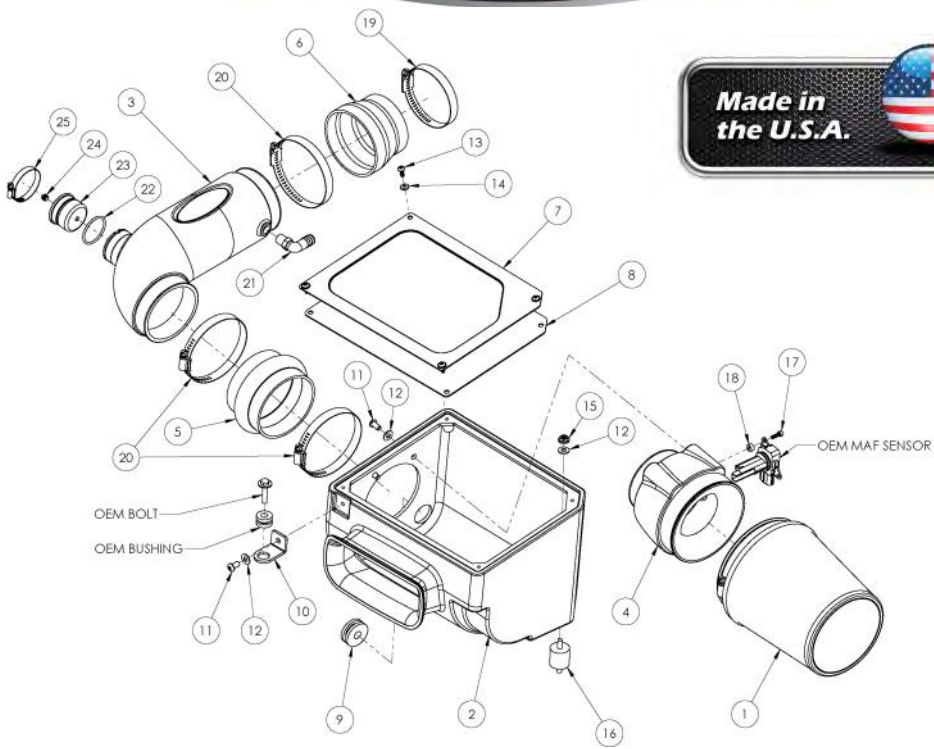

INTAKE SYSTEMS FOR VEHICLES LISTED ARE 50 STATE
LEGAL. SEE AIRAID.COM FOR CARB STATUS ON EACH
PART FOR A SPECIFIC VEHICLE.

Full color instructions can be viewed on our web site at Airaid.com. If you need
any assistance please call 1-800-858-3333 to speak with a representative in our Customer
Service Center before returning the product.


Installation Instructions

For Part Numbers:	
510-307	700-474 Airaid Oiled Media Filter
511-307	701-474 SynthaMax Dry Media Filter - Red
512-307	702-474 SynthaMax Dry Media Filter - Black
513-307	703-474 SynthaMax Dry Media Filter - Blue


2013-16 Scion FR-S and Subaru BRZ
2017 Toyota 86 and Subaru BRZ
2.0L Boxer 4

Component Identification

1. AIR-700/701/702/703-474F	Airaid Premium Filter	1
2. AIR-KIT307CAB-1	Cold Air Box	1
3. AIR-KIT307	Intake Tube	1
4. AIR-KIT307MAFADA	Filter Adapter	1
5. AIR-KITHUMPHS34	Hump Hose	1
6. AIR-KITRDCR05	Reducer	1
7. AIR-KIT307LIDC-1	Air Box Lid	1
8. AIR-KIT307G	Lid Gasket	1
9. AIR-KITGRMT09	MAF Harness Grommet	1
10. AIR-KIT307BC	Air Box Bracket	1
11. AIR-KIT15DHC3050BO	1/4-20 x 1/2" Button Head Cap Screw	4
12. AIR-KIT09FWK019BZ	1/4" Flat Washer	5
13. AIR-KIT15BHC3019BO	10-24Button Head Cap Screw	4
14. 08343	#10 Washer	4
15. AIR-KIT20WFCZ060	M6 Flange Nut	1
16. 1228599	M6 CAB Mount	1
17. AIR-KIT10SHCP	8-32 Socket Head Cap Screw	2
18. AIR-KITSPACER01	Spacer	2
19. 08577	#44 Hose Clamp	1
20. 08610	# 52 Hose Clamp	3
21. 08110FK	1/4" NPT x 1/2" Barb Elbow	1
22. AIR-KITORING127	O Ring	1
23. AIR-KIT307CAPC	Resonator Tube Plug	1
24. AIR-KITFITTING31	Brass Plug	1
25. 08460	#24 Clamp	1
26. AIR-KITPLUG02	Firewall Grommet-Not Shown	1
27. AIR-KITSTICKER53	Airaid Decal	1

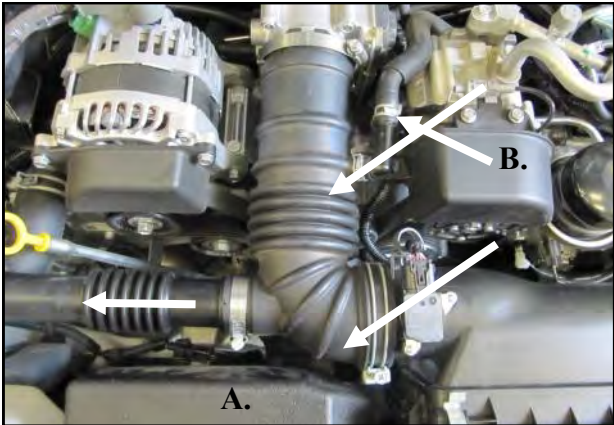


1. Disconnect The Negative Battery Terminal!
Loosen the clamps on the throttle body and the airbox
outlet. **A.** Loosen the resonator tube clamp and disconnect
it from the intake. **B.** Compress the spring clamp
on the crank case breather line and disconnect it. Re-
move the intake tube from the vehicle.

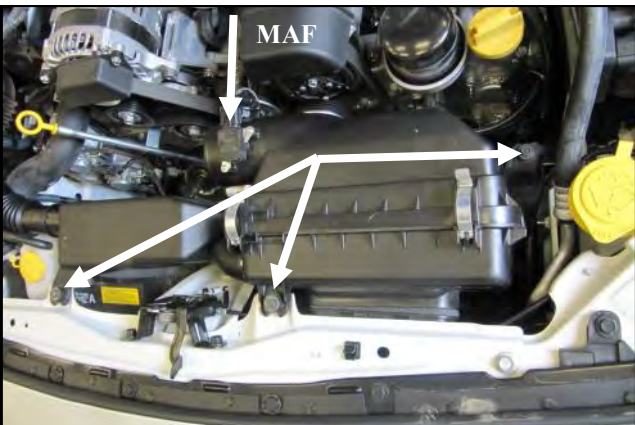

2. Disconnect the Mass Air Flow sensor, or MAF, in the
airbox. Remove the three 6mm bolts securing the airbox
assembly and remove it from the vehicle.




3. Transfer the Mass Air Flow sensor into the Filter
Adapter and secure using the two 8-32 Socket Head
Screws and Spacers .

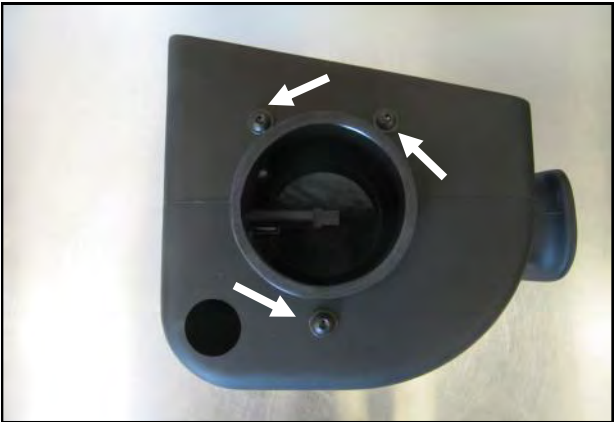


4. Install the Filter Adapter into the Cold Air Box as
shown using the 1/4-20 Button Head Screws and 1/4"
Flat Washers .



5. Install the CAB Mount into the airbox bracket on the
inner fender. Hand tight is sufficient.

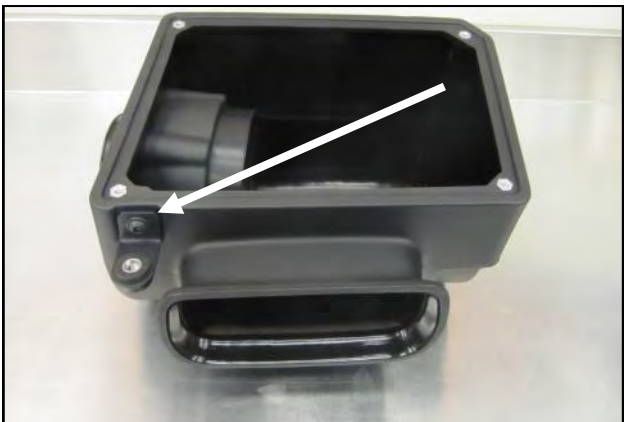


6. Mount the Airbox Bracket as shown, using one 1/4-20
Button Head Screw and a 1/4" Flat Washer. Transfer
one factory airbox mounting grommet and steel sleeve
from step 3 into the Airbox Bracket.

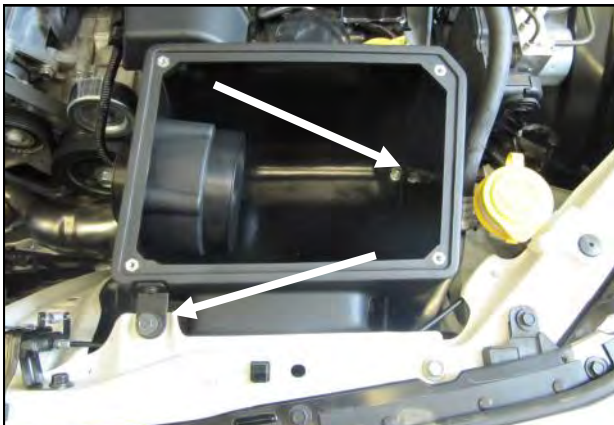


7. Slide the CAB Mount stud through the hole in the
Airbox bottom and secure it using the M6 Flange Nut
and a 1/4" Flat washer. Reuse one 6mm airbox bolt
from step 3 to join the Airbox Bracket to the core sup-
port.



8. Using a pair of diagonal cutters, or similar, split the
Harness Grommet.

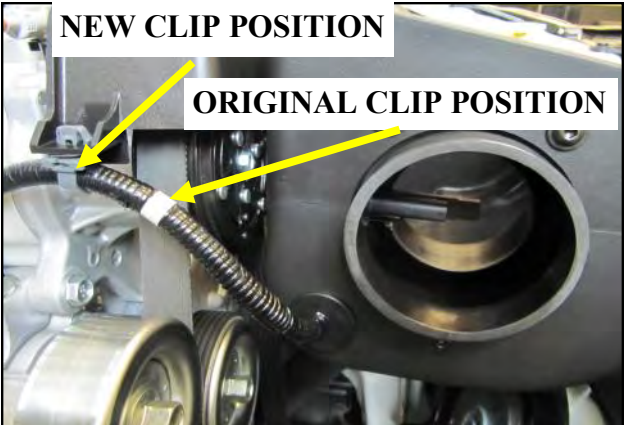

9. Route the MAF harness into the Airbox and reconnect
the sensor inside. Seal off the access port with the
Grommet from step 9. Relocate the plastic clip on the
wire harness 1 1/4" back to take up any slack that might
allow contact with the accessory belt.

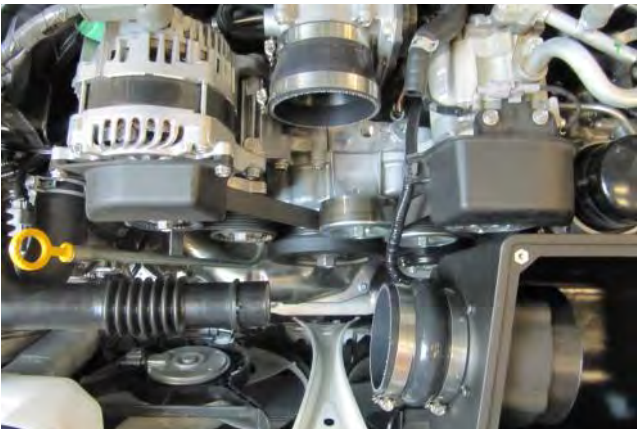

10. Place the Hump Hose and two #52 Clamps onto the Filter Adapter and the Reducer with one #52 and one #44 Clamp on the throttle body. Leave the clamps loose for now.



11. Install the Barbed Fitting into the Intake Tube and apply the Airaid Decal, as shown.



12. Install the Intake Tube and tighten all of the clamps. Connect the crank case breather to the Barbed Fitting and secure it using the OEM spring clamp. Insert the resonator into the Intake Tube and tighten the clamp.



13. Install the Airaid Premium Filter onto the Filter Adapter.




14. Carefully install the Gasket onto the Air Box Lid.



15. Install the Air Box Lid using the 10-24 Button Head Screws and the #10 Washers.
NOTE: Airaid recommends the use of LOCTITE® 242® Medium Strength Thread locker or equivalent on the Air Box Lid hardware. Reconnect the Battery.



Install Option One: Resonator Delete. Loosen the resonator tube clamp and disconnect it from the Intake. Remove the two 6mm bolts in the diaphragm housing and pull the sound tube out of the fire wall. Remove the entire resonator as an assembly.

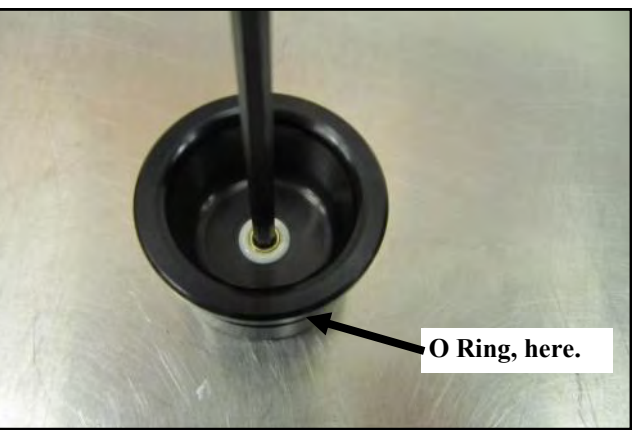

Apply a thread sealer to the threads of the Brass plug and insert it into the Resonator Tube Plug. Slide the O Ring onto the plug and into the groove. Install the Plug Assembly into the Intake tube port and secure using the #24 Clamp. It should be noted that the Aluminum Plug is designed to accept many 1/16 NPT N2O foggers.



Place the Firewall Grommet into the bulkhead. **NOTE:** The resonator Delete option has no positive or negative effect on performance.



Install Option Two: OEM air inlet removal. While not necessary, maximum power is achieved by removing the OEM inlet from the vehicle.



With help from an assistant. The inlet can be removed without removing the entire bumper cover. Simply remove all of the topside fasteners and pull back on the cover. Have an assistant remove the two 6mm bolts in the tube and remove.



Double check your work ! Make sure there is no foreign material in the intake path. Make sure all clamps, hoses, bolts, and screws are tight. Double check the hood clearance!

Thank you for purchasing the Airaid Intake System. Contact Airaid @ (800) 498-6951 8:00 AM - 5:00 PM MST weekdays for questions regarding fit or instructions that are not clear to you. Your Airaid Intake System was carefully inspected and packaged. Check that no parts are missing, or were damaged during shipping. If any parts are missing, contact Airaid. The air filter element is protected from direct exposure to water and debris; care should be taken not to drive through deep water. WATER INGESTION IS THE DRIVERS RESPONSIBILITY! The air filter is reusable and should be cleaned periodically.

FILTER IDENTIFICATION

700-474 Airaid Oiled Media
702-474 Airaid SynthaMax Dry Media - Black

701-474 Airaid SynthaMax Dry Media - Red
703-474 Airaid SynthaMax Dry Media - Blue

For your Oiled media filter we suggest using the AIRAID Filter Tune-Up Kit.

P/N 790-551 Aerosol Spray
P/N 790-550 Squeeze Spray

INTAKE SYSTEMS FOR VEHICLES LISTED ARE 50 STATE LEGAL. SEE AIRAID.COM FOR CARB STATUS ON EACH PART FOR A SPECIFIC VEHICLE.

Synthamax Air Filters do not require oil. Service air filter as needed by cleaning with common non-petroleum all-purpose household cleaner and water. Simple Green®, Formula 409® or equivalent works great. Apply cleaner to outside of air filter and allow to soak. Then flush filter clean from the inside out with a garden hose and repeat steps if necessary. Do not apply high pressure water or air to clean filter. Allow filter to air dry and reinstall.