



Equipped with AEM® Dryflow™ Filter
No Oil Required!

INSTALLATION INSTRUCTIONS

PART NUMBER: 22-482

2000-2003

MAZDA

Miata

L4-1.8L

C.A.R.B. E.O. # D-392-28

* NOTE: Legal in California only for racing vehicles which may never be used upon a highway

PARTS LIST

Description	Qty.	Part Number
Element Parts Kit 2.75 X 5" Dry Ele.	1	21-202DK
Upper Pipe	1	2-4821
Lower Pipe	1	2-4822
Hose, Adapter 2.50/2.75 X 3" Bl.	1	5-257
Hose, Silicone 2.75x2" Black	2	5-272
Zip Tie, 6 Long	1	1-113
Grommet, IAT	1	8-122
Hose Clamp, 3/4"	1	4093-5
1/2" Bnd. Hose Clamp, 2.56"-3.50"	1	9448
1/2" Bnd. Hose Clamp, 2.31-3.25"	5	9444
1/2" Bnd. Hose Clamp, 2.15-3.00"	1	9440

Read and understand these instructions BEFORE attempting to install this product. Failure to follow installation instructions and not using the provided hardware may damage the intake tube, throttle body and engine.

1. Preparing Vehicle

- a. Make sure vehicle is parked on level surface.
- b. Set parking brake.
- c. If engine has run in the past two hours, let it cool down.
- d. Disconnect negative battery terminal.
- e. Do not discard stock components after removal of the factory system.

2. Removal of stock system

- a. Refer to diagram (Fig. 1) on page 5 for the identification of these components: ventilation hose, intake air temp. sensor and the mass air flow sensor (MAF).
- b. Disconnect the ventilation hose from the air hose.
- c. Loosen the two hose clamps that secure the air hose to the throttle body and the MAF sensor. Remove the air hose.
- d. Disconnect the MAF sensor and intake air temp sensor wires.
- e. Remove the air filter assembly by removing the 3 bolts. (Fig. 2)
- f. Remove the headlight relays from relay mount. (Fig. 3)
- g. Loosen the three bolts holding the relay and air cleaner assembly mount and remove it. (Fig. 3)
- h. Mount the headlight relays to the fender using the factory threaded holes and the original relay mount bolts. (Fig. 4)
- i. Separate the MAF sensor from the air cleaner assembly by loosening the two 10 mm bolts.
NOTE: Make note of which end of the MAF sensor is the inlet side. (Fig. 5)
- j. Separate the air temp sensor and its rubber grommet from the air cleaner cap.

3. Installation of AEM® Intake System

- a. When installing the intake system, do not completely tighten the hose clamps or mounting hardware until instructed to do so.
- b. Check to see that the inside of the AEM® intake pipes and air filter are clean and free from any obstructions.
- c. Install the 2.50" / 2.75" adapter onto the throttle body using a supplied hose clamp (9444).
- d. Install one (9444) hose clamp onto the other end of the coupler.
- e. Slide the 2.75" curved intake pipe onto the coupler. (Fig. 8)
- f. Install the 2.75" coupler onto the exposed end of the upper intake pipe, securing it with a No. (9444) clamp.
- g. Slide the outlet end of the MAF sensor into the coupler, and secure it with a No. (9444) hose clamp.
- h. Install the rubber grommet into the 3/4" hole in the lower intake pipe. (Fig 6)
- i. Install the air filter onto the end of the lower intake tube and secure it with a No. 44 Hose clamp. (Fig. 6)
- j. Using the 2.75" coupler, and 2 No. (9444) clamps, install the lower intake pipe onto the inlet side of the MAF sensor and secure the bracket to the power steering pump bracket using the original nut, as shown. (Fig. 7)
- k. Install the air temp sensor in the rubber grommet installed on the lower intake tube.
- l. Bundle the excess wiring away from any moving objects and the exhaust manifold using the included zip tie.
- m. Install the valve cover breather hose onto the nipple on the upper intake tube.
- n. Connect the wiring harnesses to the MAF sensor and the air temp sensor.

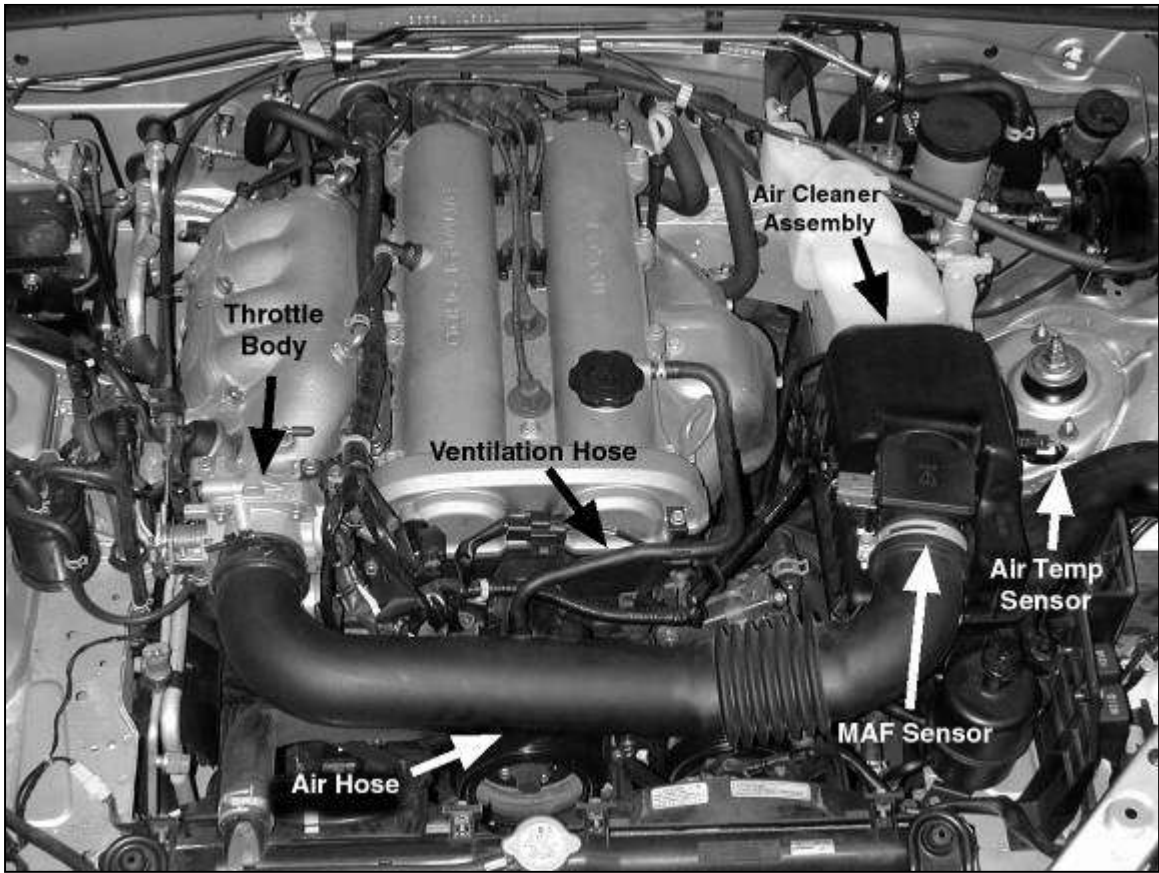


Fig. 1

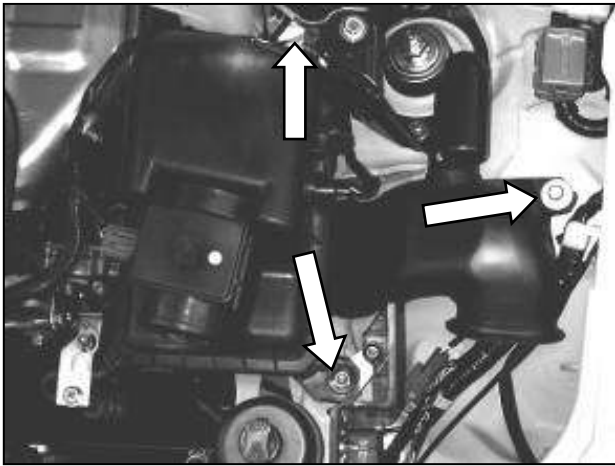


Fig. 2

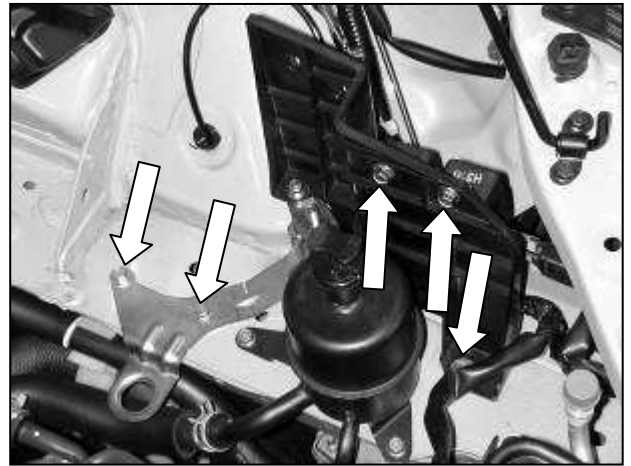


Fig. 3

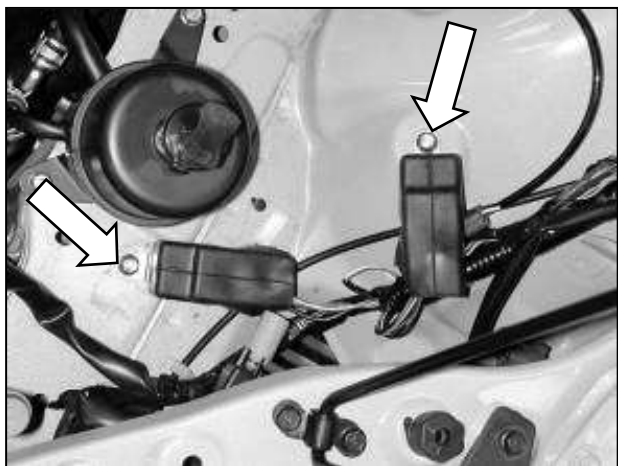


Fig. 4

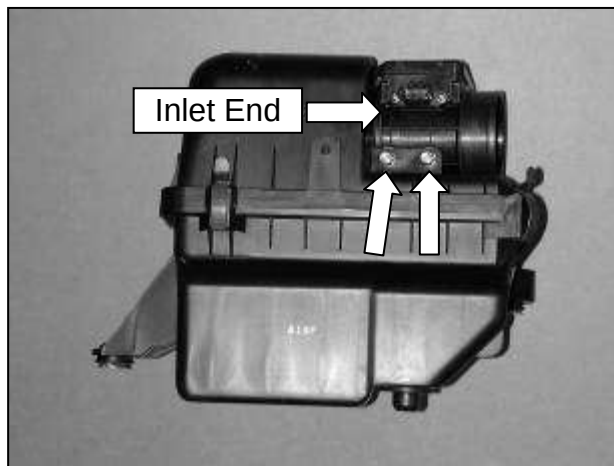


Fig. 5



Fig. 6



Fig. 7

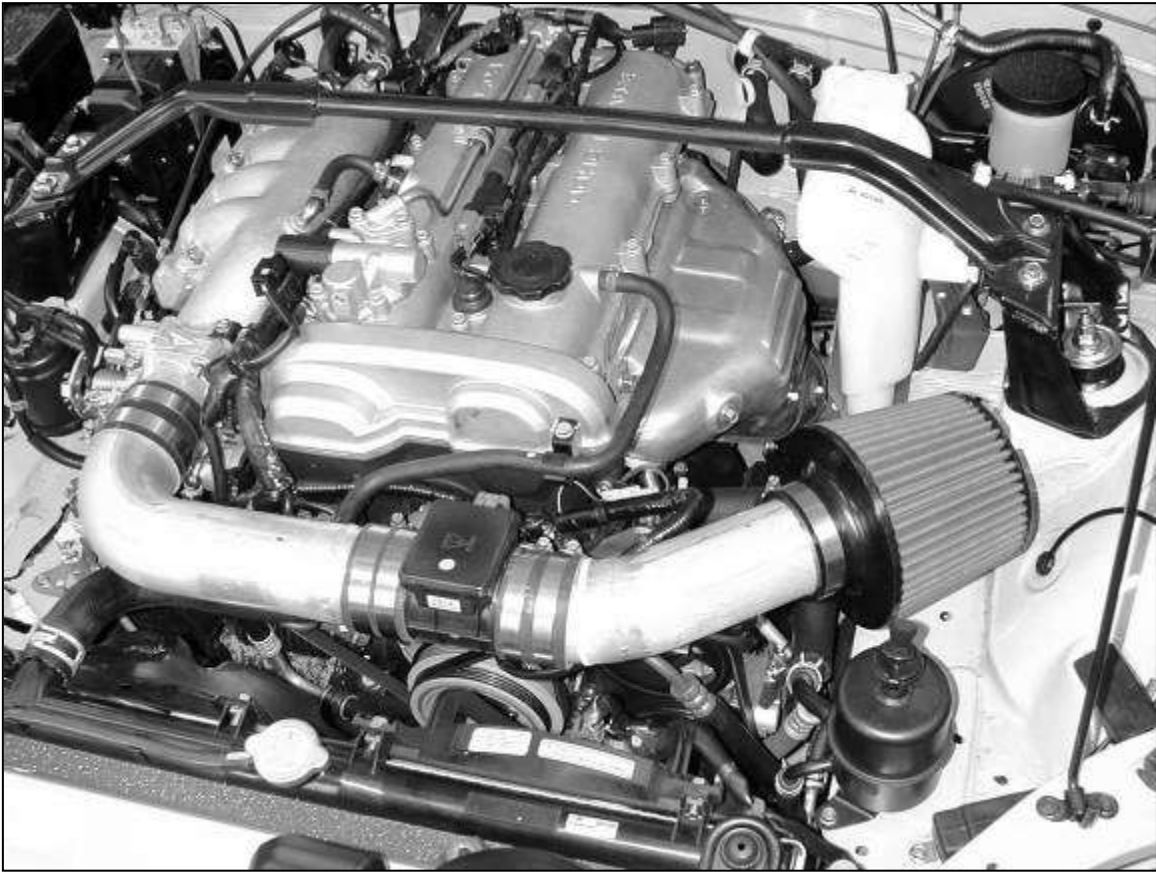


Fig. 8

4. Reassemble Vehicle

- a. Position the inlet pipes for the best fitment. Be sure that the pipes or any other components do not contact any part of the vehicle. Tighten the rubber mount, all bolts, and hose clamps.
- b. Check for proper hood clearance. Re-adjust pipes if necessary and re-tighten them.
- c. Inspect the engine bay for any loose tools and check that all fasteners that were moved or removed are properly tightened.
- d. Reconnect negative battery terminals and start engine. Let the vehicle idle for 3 minutes. Perform a final inspection before driving the vehicle.

5. CARB Sticker Placement

- a. The C.A.R.B. exemption sticker, (attached), must be visible under the hood so that an emissions inspector can see it when the vehicle is required to be tested for emissions. California requires testing every two years, other states may vary.

6. Service and Maintenance

- a. It is recommended that you service your AEM® Dryflow™ filter every 20,000 miles for optimum performance. Use AEM Dryflow cleaning kit part # 21-110.
- b. Use aluminum polish to clean your polished AEM® intake tube.
- c. Use window cleaner to clean your powder coated AEM® intake tube. **(NOTE: DO NOT USE aluminum polish on powder coated AEM intake tubes).**

AEM Air Intake System Warranty Policy

AEM® warrants that its intake systems will last for the life of your vehicle. AEM will not honor this warranty due to mechanical damage (i.e. improper installation or fitment), damage from misuse, accidents or flying debris. AEM will not warrant its powder coating if the finish has been cleaned with a hydrocarbon-based solvent. The powder coating should only be cleaned with a mild soap and water solution. Proof of purchase of both the vehicle and AEM intake system is required for redemption of a warranty claim.

This warranty is limited to the repair or replacement of the AEM part. In no event shall this warranty exceed the original purchase price of the AEM part nor shall AEM be responsible for special, incidental or consequential damages or cost incurred due to the failure of this product. Warranty claims to AEM must be transportation prepaid and accompanied with dated proof of purchase. This warranty applies only to the original purchaser of product and is nontransferable. Improper use or installation, use for racing, accident, abuse, unauthorized repairs or alterations voids this warranty. AEM disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by AEM. Warranty returns will only be accepted by AEM when accompanied by a valid Return Merchandise Authorization (RMA) number. Credit for defective products will be issued pending inspection. Product must be received by AEM within 30 days of the date RMA is issued.

If you have a warranty issue, please call (800) 992-3000 and our customer service department will assist you. A proof of purchase is required for all AEM warranty claims.